

HT301 SOLAR WATER HEATER PARTNER



Product features

Safety, energy saving, efficient, beautiful, fast is the purpose of the product design.

1. Safety

Multiple safety protection, safe and reliable;

Intelligent control with water and electricity over temperature protection against dry protection device;

Flow protection function, intelligent traffic control, the flow is greater than 1 + / - 0.2 L/Min can be heated.

2. Energy-saving

Without preheating and heat preservation and energy saving province electricity;

3. Efficient

Professional design of crystal the electro-thermal pipe has good thermal conductivity, thermal efficiency is as high as 95%.

Heating pipe system temperature lower than 63 degrees, difficult to form, scale heat transfer faster, use for a long time, maintain such as heating efficiency.

Can satisfy the bathroom shower, sink basin, kitchen hot water demand.

4. Beautiful

Color-glass culture pattern design, comfortable and easy;

5. Fast

Without preheating, the hot water of your required temperature will flow out after the boot, make more convenient;

6. High-tech

Microcomputer numerical control "QSCC" water and electricity separation heating technology, safe and convenient;

Main functions and characteristics

1. All-weather automatic management and auxiliary solar water heater work;

2. Intelligent energy-saving heat device, make your solar water heater to be used properly with the lack of light;

3. Using "QSCC" hydropower separation heater, safety, high efficiency, long life;

4. Advanced microcomputer control system, safe, reliable and humanization;


5. Pure resistive load, inductance, electromagnetic radiation, green environmental protection no pollution;

6. Computer control overheating protection, 30 minutes without automatic shutdown operation;
7. Multiple security protection, make the safety performance of water heater;
8. Thermal efficiency is as high as 95%, relative to traditional product more save electricity;
9. Rotary flow sensor sampling, no water is not turned on, never dry;
10. Fashionable appearance, ultra-thin body, beautiful and easy;
11. Easy installation, easy operation, terminal heating mode, without waiting for;
12. Using high-tech production technology and high precision testing instrument;
13. Suitable for family, hotel, beauty salon, hospital need warm water, such as occasion;


Product technical parameters

| | | |
|---|----------------------------------|---------|
| Product model | HT-301A | HT-301B |
| The Rated power | 5500W | 5000W |
| The Rated voltage | AC220V/50Hz | |
| The range of Current(reference) | 25A | 23A |
| Wire cross-sectional area | 2.5mm ² (Copper wire) | |
| The type of protection against electric shock | 1 | |
| Waterproof level | IPX4 | |
| Temperature of self protection | 60℃ | |
| The rated pressure | 0MPa | |
| The minimum start-up flow | 1±0.2L/Min | |
| Overall dimensions(The host) | 330mm*200mm*70mm | |
| Gross Weight | 4KGS | |

Installation

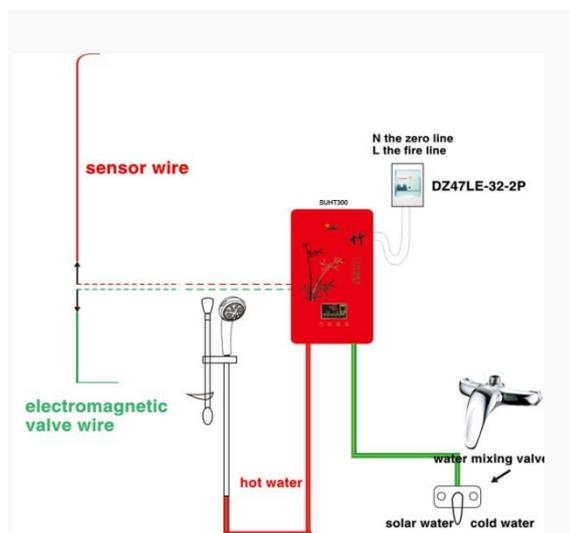

F1

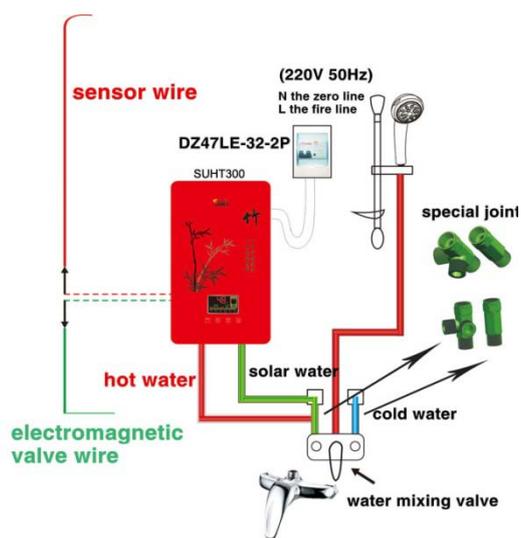

F2